

Technical Specifications

Power Supply	6 ... 30VDC
Power Consumption	typ. 89mW, max. 121mW
Total Power Loss	max. 121mW
Safety Rating	IP30
Capacitive Touch	5 Touch Points, capacitive touch detection
Ambient Temperature	-20...70°C / -4...158°F
Temperature Detection Range	-40...125°C / -40...257°F +/- 0.5°C / 0.9°F
Humidity Detection Range	0...100% r.H. +/- 2% (non-condensing)
Dimensions	104x44.5x18.9mm / 4.09x1.75x0.74" (LxWxH)
Maintenance & Cleaning	This device is free of maintenance and may only be cleaned with a dry cloth.

Connection

Wire conductor cross-section	0.25 ... 0.8mm ² / AWG23 ... AWG18
Stripping Length	5mm / 0.2"

LOXONE

**Loxone
Electronics GmbH**
Smart Home 1
4154 Kollerschlag
Austria



For additional information,
declaration of conformity, visit
www.loxone.com/datasheets

V151024



Need Help?
loxone.com/support

LOXONE



Touch Tree

Part No.: 100425 (White)
Part No.: 100604 (Anthracite)

About the product



The Loxone Touch has five touch zones, which can be configured according to your needs. The large central touch zone is ideal for controlling lighting, whilst the corner zones are handy for controlling music and blinds, for example.

Features

- 5 touch buttons
- Temperature & humidity sensor
- Optional click feedback

Installation

Install the mounting frame on the desired installation place. Power up the device and pair it with your Miniserver in Loxone Config.

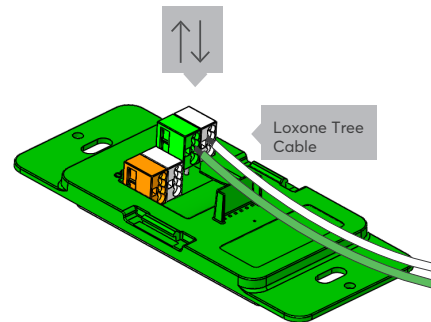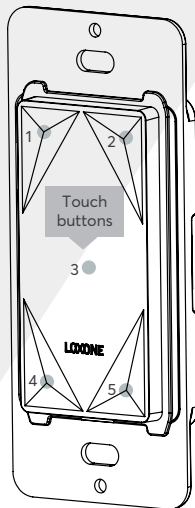

This folder is a part of the product!



For additional information,
visit www.loxone.com/help/touch-tree-us