

## Datasheet

### Water Sensor Air

Part No: 100211




#### About the product

The Loxone Water Sensor Air is a wireless sensor with two contacts on the bottom. The sensor activates when the contacts come into contact with a conductive liquid. This allows monitoring of indoor water intrusion or leakage.

#### Electrical Data

Power supply	CR2032 battery
Interfaces	Loxone Air: 868MHz (SRD Band Europe), 4 channels available max. Power 15.1mW e.r.p. 915MHz (ISM Band Region 2), 10 channels available max. Power 13.2mW internal antenna
Sensor	contact pins
Ambient temperature	0 ... 55°C / 32 ... 131°F
Battery lifetime	up to 2 years
Humidity	max. 95% r.H. (non condensing)
Learn button	can also be used as a push button

#### Connection Diagram

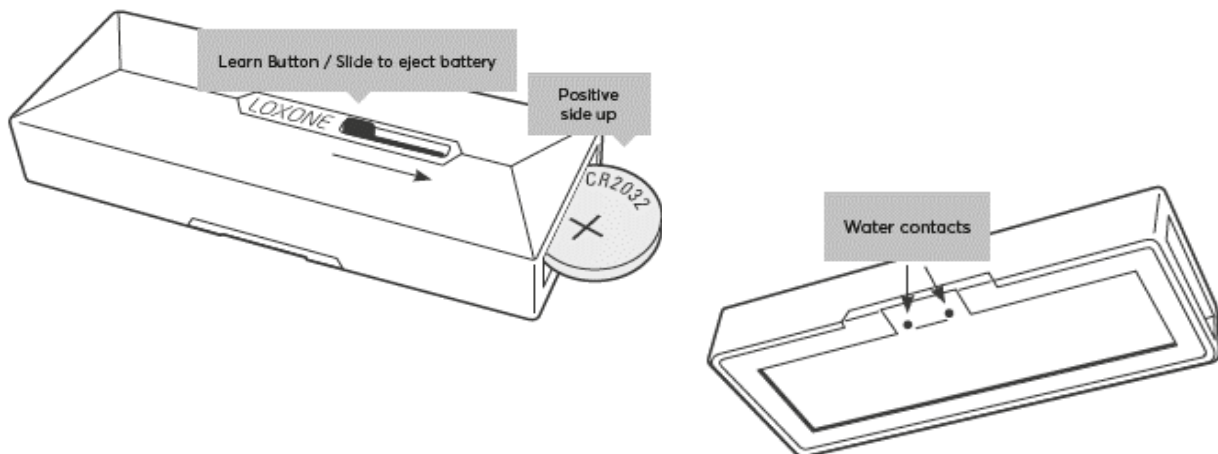


## Product Characteristics

Colours	Blue: RAL5012
Finish	Matte

## Weight & Dimensions

Net weight	22g
Total weight	45g
Product dimensions	74.3x28.5x13.6mm / 2.92x1.12x0.53" (LxWxH)

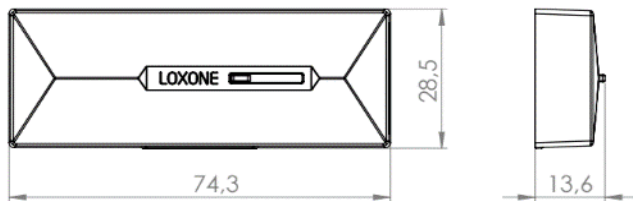

Pack size	122x80x22mm / 4.80x3.15x0.87" (LxWxH)
-----------	---------------------------------------

## Certifications & Standards

Safety rating	IP20
---------------	------

Certifications



Installation must be carried out by a qualified electrician in accordance with the relevant regulations.

### Published by

**Loxone Electronics GmbH**

Smart Home 1

4154 Kollerschlag

Austria

Tel: +43 7287 7070-0

loxone.com

## Datenblatt

### Wassersensor Air

Art. Nr. 100211




### Information zum Produkt

Der Loxone Wassersensor Air ist ein Funksensor mit zwei Kontakten an der Unterseite. Der Sensor löst aus, wenn die Kontakte mit einer leitfähigen Flüssigkeit in Berührung kommen. Dies ermöglicht eine Überwachung auf Ein- und Austritt von Wasser in Innenräumen.

### Elektrische Daten

Spannungsversorgung	CR2032 Batterie
Schnittstellen	Loxone Air: 868MHz (SRD Band Europa), 4 Kanäle wählbar max. Sendeleistung 15,1mW e.r.p. 915MHz (ISM Band Region 2), 10 Kanäle wählbar max. Sendeleistung 13,2mW interne Antenne
Sensor	Kontaktstifte
Umgebungstemperatur	0 ... 55°C / 32 ... 131°F
Batterie Lebensdauer	bis zu 2 Jahre
Luftfeuchtigkeit	max. 95% r.H. (nicht kondensierend)
Einlerntaste	auch als Tasteneingang verwendbar

### Anschlussplan

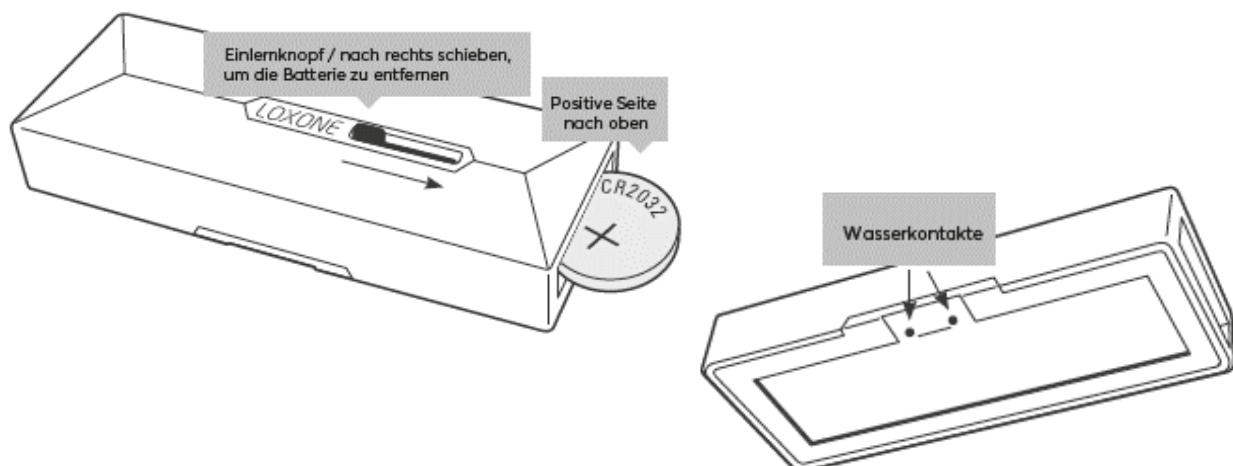


# LOXONE

## Produkteigenschaften

Farbe	Blau: RAL5012
Glanzgrad	Matt

## Gewicht & Abmessungen

Nettogewicht	22g
Bruttogewicht	45g
Produktmaße	74,3x28,5x13,6mm / 2,92x1,12x0,53" (LxBxH)

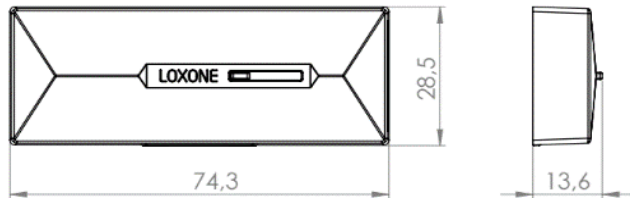

Packmaß	122x80x22mm / 4,80x3,15x0,87" (LxBxH)
---------	---------------------------------------

## Zertifizierungen & Standards

Schutzart	IP20
-----------	------

Zertifizierungen



Die Installation muss nach den einschlägigen Vorschriften durch eine Elektrofachkraft erfolgen.

## Veröffentlicht von Loxone Electronics GmbH

Smart Home 1  
4154 Kollerschlag  
Austria  
Tel: +43 7287 7070-0  
loxone.com